CON-TROL-CURE®

Technical Data

RQ 445 Z4 excl. UVPS, 80025240

Hg metal halide lamp

Dimensions:

la:	106,0 mm $^{+0,0}_{-3,0}$	lb:	93,0 mm	lc:	31,0 mm
ld:		le:		da:	13,5 mm

connection / socket: R7s

Legend:

Tube:	**Socket 1:**	**Socket 2:**
	UVPS-4A	
	80025240 - XX	

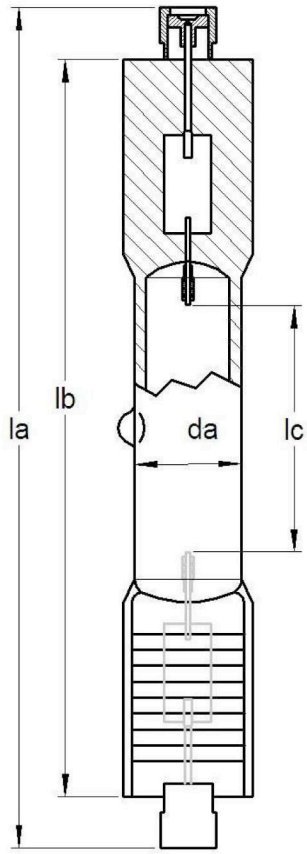

Electrical data:

Lamp wattage:	400 W
Lamp voltage:	135 (±15,0)V
Lamp current:	3,2 A
Line voltage:	230 V
Ballast:	N 400-03.2-34/12 Fa. M+C
Ignitor:	ZRM 4.5 ES/B

Operating conditions:

Burning position:	vertical
Body temperature:	650°C - 950°C
Pinch temperature:	< 300°C
Ignition retardation:	30 s

Life time:

Useful lifetime:	750 h
Intensity drop:	<= 30 % 315-400 nm nm after 500 h - based on 20 h level
Power switching:	25' / 5' (on/off) On/Off

All data is based on average values. Due to technical and/or physical reason each lamp could spread up to +/- 10 %..

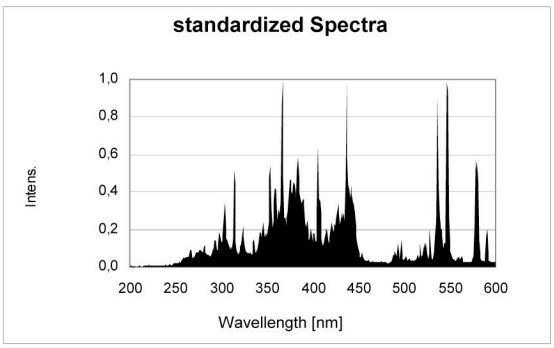

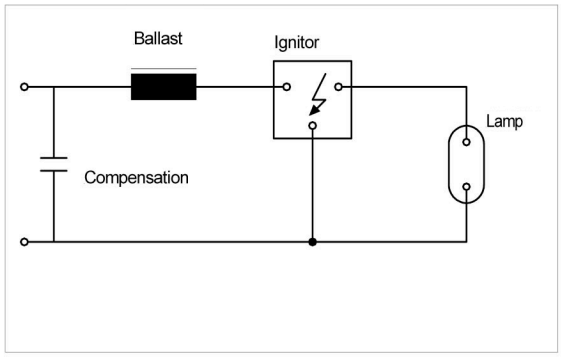

UV Process Supply • 1229 W. Cortland Street • Chicago, IL 60614 • 1-800-621-1296 • 1-773-248-0099 • Fax: 1-773-880-6647

©COPYRIGHT 2006 U. V. PROCESS SUPPLY, INC.